




LightWell Daylight Emulation® System

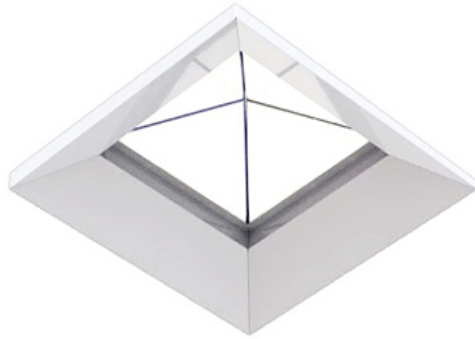

Arborlight offers the appeal of a skylight with the convenience of a fixture.

Realtime, local daylight quality LED illumination creates a sense of time and connectivity with the outside world

Wireless connectivity and control by unit or group via tablet, computer or mobile phone

Easy installation in grid, open or drywall ceilings

Optional wall mounted controls

Ordering Code


LW16

Family


Options

Options

CCEA Compliant	CCEA
Occupancy Sensor	OC
Wall-Mounted Control	WMC



Overhead

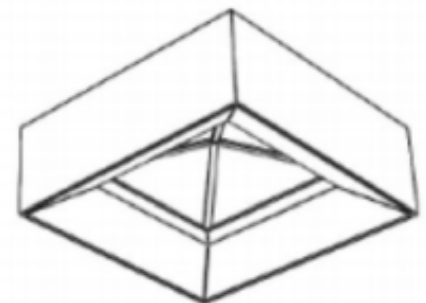

45 Angle

Performance Summary

Typical Illumination Area	450 sf
Max Input Power	350 W, 0.8 w/sf
Color Rendering Index	90-96
Max Lumen (6000k)	20,000
Correlated Color Temperature (Adjustable)	2,800 – 11,800 K
Limited 3rd Party Warranty (Parts and Labor)	5 Years
Expected Lifetime	50,000 hours





Specifications

Dimensions (WxLxD)	47.7" x 47.7" x 16"
Weight	100 lbs
Glazing	Polycarbonate
Power Factor	>.97 at 110VAC >.92 at 277VAC

Housing

20 gauge steel
IC rated recessed Housing
White polyurethane enamel coating

Installation

Mounting is recessed
4 eyelet connections
Can sit within 4' x 4' grid section

Safety

UL Certified
City of Chicago Environmental Air
(CCEA) compliance (optional)

